




## **SKID STEER LOADER**

QINGDAO SLILIFT INTELLIGENT EQUIPMENT CO., LTD.

## STRONG POWER, PERFECT HYDRAULIC SYSTEM AND SOLID & DURABLE HARDWARE


### EASY MAINTENANCE

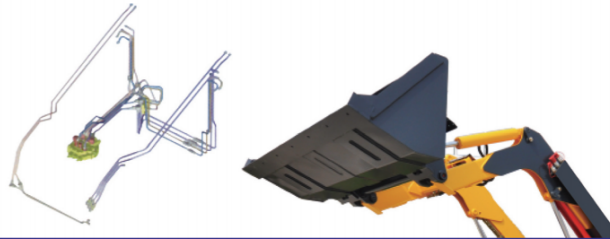

### Heavy-load work equipment



### Best-matched driving system

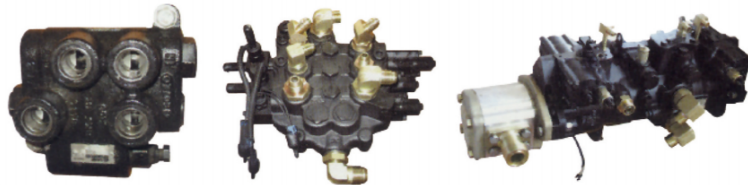

### Efficient hydraulic system

#### MODEL NAMING RULES:

SS: SKID STEER LOADER MINI

SL: NORMAL SKID STEER LOADER

ST: CRAWLER SKID STEER LOADER

### Maintenance

Easy maintenance and daily adjustment for chain.

Chains located in sealed box structure are effectively protected from dust to avoid damage.

Perfect real-time monitor can show the status of hydraulics and electric circuit.

Quick hitch brings ease to the fast change of working equipment.

Easy-tilt cab with ROPS features the fast, convenient check-up of engine, pump and other components when maintenance or service is required.

Rear door with external rotation is easy to open, and convenient to clean.


**SL25**

Operating weight: 1260kg  
Bucket capacity:0.2m<sup>3</sup>


**SL35**

Operating weight: 2200kg  
Bucket capacity:0.25m<sup>3</sup>

| Model                  |                | SL25                                                                           | SL35                                                                                    |
|------------------------|----------------|--------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------|
| Rated load             | kg             | 380                                                                            | 500                                                                                     |
| Tipping load           | kg             | 760                                                                            | 1000                                                                                    |
| Bucket capacity        | m <sup>3</sup> | 0.2                                                                            | 0.25                                                                                    |
| Operating Weight       | kg             | 1260                                                                           | 2200                                                                                    |
| Max.travel speed       | km/h           | 9                                                                              | 12                                                                                      |
| Hydraulic pump flow    | L/min          | 50                                                                             | 75                                                                                      |
| Fuel tank capacity     | L              | 28                                                                             | 60                                                                                      |
| Tire type              |                | 5.7-12 / 560×155 (Solid tire)                                                  | 8.5-15NHS                                                                               |
| Dimensions             | mm             | 2580×900×1810                                                                  | 2950×1350×2000                                                                          |
| Max.Operating height   | mm             | 3300                                                                           | 3300                                                                                    |
| Hinge pin height       | mm             | 2350                                                                           | 2725                                                                                    |
| Width with bucket      | mm             | 900                                                                            | 1400                                                                                    |
| Track width            | mm             | 745                                                                            | 1080                                                                                    |
| Wheelbase              | mm             | 800                                                                            | 897                                                                                     |
| Ground clearance       | mm             | 130                                                                            | 150                                                                                     |
| Dumping angle          | °              | 40                                                                             | 40                                                                                      |
| Dumping height         | mm             | 1910                                                                           | 2050                                                                                    |
| Dumping reach          | mm             | 420                                                                            | 790                                                                                     |
| Engine Maker/Model     |                | Perkins 403D                                                                   | XinChai C490BPG                                                                         |
| Power/Rotate speed     |                | 18.4KW (25HP) /3200rpm                                                         | 36.8KW (50HP) /2650rpm                                                                  |
| Type                   |                | 3Cylinder, Water cooled,4 stroke                                               | Water cooled,4 stroke                                                                   |
| Displace ment          | L              | 1.1                                                                            | 2.27                                                                                    |
| Standard configuration |                | Open-type cab<br>Pilot control                                                 | Open-type cab<br>Mechanical type                                                        |
| Options                |                | Kubota engine<br>Starting assist system<br>Mechanical type<br>Air conditioning | Mitsubishi/Yanmar engine<br>Starting assist system<br>Pilot control<br>Air conditioning |

## SKID STEER LOADER



EURO5 STANDARD EPA

**SL45**

Operating weight: 2850kg  
Bucket capacity: 0.4m<sup>3</sup>



EURO5 STANDARD EPA

**SL60**

Operating weight: 3050kg  
Bucket capacity: 0.45m<sup>3</sup>

| Model                  |                | SL45                                                                         | SL60                                                                         |
|------------------------|----------------|------------------------------------------------------------------------------|------------------------------------------------------------------------------|
| Rated load             | kg             | 700                                                                          | 850                                                                          |
| Tipping load           | kg             | 1400                                                                         | 1700                                                                         |
| Bucket capacity        | m <sup>3</sup> | 0.4                                                                          | 0.45                                                                         |
| Operating Weight       | kg             | 2850                                                                         | 3050                                                                         |
| Max.travel speed       | km/h           | 12                                                                           | 12                                                                           |
| Hydraulic pump flow    | L/min          | 75                                                                           | 75                                                                           |
| Fuel tank capacity     | L              | 70                                                                           | 80                                                                           |
| Tire type              |                | 10-16.5NHS                                                                   | 12-16.5NHS                                                                   |
| Dimensions             | mm             | 3490×1730×2150                                                               | 3490×1850×2260                                                               |
| Max.Operating height   | mm             | 3980                                                                         | 4000                                                                         |
| Hinge pin height       | mm             | 3080                                                                         | 3100                                                                         |
| Width with bucket      | mm             | 1740                                                                         | 1890                                                                         |
| Track width            | mm             | 1450                                                                         | 1500                                                                         |
| Wheelbase              | mm             | 991                                                                          | 991                                                                          |
| Ground clearance       | mm             | 185                                                                          | 205                                                                          |
| Dumping angle          | °              | 40                                                                           | 40                                                                           |
| Dumping height         | mm             | 2380                                                                         | 2450                                                                         |
| Dumping reach          | mm             | 750                                                                          | 750                                                                          |
| Engine Maker/Model     |                | XinChai C490BPG                                                              | XinChai A498BPG                                                              |
| Power/Rotate speed     |                | 36.8KW (50HP) /2650rpm                                                       | 45KW (60HP) /2600rpm                                                         |
| Type                   |                | Water cooled,4 stroke                                                        | Water cooled,4 stroke                                                        |
| Displace ment          | L              | 2.27                                                                         | 2.67                                                                         |
| Standard configuration |                | Enclosed cab<br>Mechanical type                                              | Enclosed cab<br>Mechanical type                                              |
| Options                |                | Yanmar engine<br>Starting assist system<br>Pilot control<br>Air conditioning | Yanmar engine<br>Starting assist system<br>Pilot control<br>Air conditioning |


**SL75**

Operating weight: 3400kg  
Bucket capacity: 0.53m³


**SL100**

Operating weight: 3650kg  
Bucket capacity: 0.6m³

| Model                  |       | SL75                                                                                              | SL100                                                                                              |
|------------------------|-------|---------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------|
| Rated load             | kg    | 1000                                                                                              | 1200                                                                                               |
| Tipping load           | kg    | 2000                                                                                              | 2400                                                                                               |
| Bucket capacity        | m³    | 0.53                                                                                              | 0.6                                                                                                |
| Operating Weight       | kg    | 3400                                                                                              | 3650                                                                                               |
| Max.travel speed       | km/h  | 12                                                                                                | 12/18                                                                                              |
| Hydraulic pump flow    | L/min | 75                                                                                                | 77                                                                                                 |
| Fuel tank capacity     | L     | 90                                                                                                | 90                                                                                                 |
| Tire type              |       | 12-16.5NHS                                                                                        | 12-16.5NHS                                                                                         |
| Dimensions             | mm    | 3490×1850×2260                                                                                    | 3580×1880×2160                                                                                     |
| Max.Operating height   | mm    | 4260                                                                                              | 4070                                                                                               |
| Hinge pin height       | mm    | 3200                                                                                              | 3150                                                                                               |
| Width with bucket      | mm    | 1890                                                                                              | 1880                                                                                               |
| Track width            | mm    | 1500                                                                                              | 1500                                                                                               |
| Wheelbase              | mm    | 1085                                                                                              | 1176                                                                                               |
| Ground clearance       | mm    | 205                                                                                               | 205                                                                                                |
| Dumping angle          | °     | 40                                                                                                | 40                                                                                                 |
| Dumping height         | mm    | 2550                                                                                              | 2450                                                                                               |
| Dumping reach          | mm    | 700                                                                                               | 700                                                                                                |
| Engine Maker/Model     |       | XinChai A498BZG                                                                                   | WeiChai WP 4.1                                                                                     |
| Power/Rotate speed     |       | 55KW (75HP) /2500rpm                                                                              | 74KW (100HP) /2500rpm                                                                              |
| Type                   |       | Water cooled,4 stroke                                                                             | 4Cylinder in-line,Water cooled,4 stroke,Diesel engine                                              |
| Displace ment          | L     | 3.168                                                                                             | 4.1                                                                                                |
| Standard configuration |       | Enclosed cab<br>Pilot control                                                                     | Enclosed cab<br>Pilot control                                                                      |
| Options                |       | Mitsubishi/Yanmar engine<br>Starting assist system<br>Big flow hydraulic pump<br>Air conditioning | Mitsubishi/Cummins engine<br>Big flow hydraulic pump<br>Starting assist system<br>Air conditioning |

## SKID STEER LOADER



### ST25/ST50

Operating weight: 1500kg/2800kg  
Bucket capacity: 0.2m³/0.35m³

### SS850

Operating weight: 1124kg  
Bucket capacity: 0.2m³

| Model                  |       | ST25/ST50                                                                              | SS850                      |
|------------------------|-------|----------------------------------------------------------------------------------------|----------------------------|
| Rated load             | kg    | 380/700                                                                                | 380                        |
| Tipping load           | kg    | 760/1400                                                                               | 416                        |
| Bucket capacity        | m³    | 0.2/0.35                                                                               | 0.2                        |
| Operating Weight       | kg    | 1500/2800                                                                              | 1224                       |
| Max.travel speed       | km/h  | 12/10                                                                                  | 5.6                        |
| Hydraulic pump flow    | L/min | 37/40                                                                                  | 37                         |
| Fuel tank capacity     | L     | 28/50                                                                                  | 35                         |
| Track type             |       | 200×72×45/300×52.5                                                                     | 200×72×45                  |
| Dimensions             | mm    | 2910×1100×1860/2950×1400×2050                                                          | 2619×1103×1338             |
| Max.Operating height   | mm    | 3690/3350                                                                              | 2626                       |
| Hinge pin height       | mm    | 2780/2770                                                                              | 1869                       |
| Width with bucket      | mm    | 1200/1500                                                                              | 1250                       |
| Tread width            | mm    | 900/1100                                                                               | 918                        |
| Wheelbase              | mm    | 1240                                                                                   | 1240                       |
| Ground clearance       | mm    | 145                                                                                    | 141                        |
| Dumping angle          | °     | 40                                                                                     | 37                         |
| Dumping height         | mm    | 1930/2100                                                                              | 1272                       |
| Dumping reach          | mm    | 650/790                                                                                | 833                        |
| Engine Maker/Model     |       | Kobota D1105/XinChai C498BPG                                                           | Kobota D1105 Diesel Engine |
| Power/Rotate speed     |       | 18.2KW(25HP)@2650rpm /36.8KW(50HP)@2650rpm                                             | 18.2KW@3000rpm             |
| Type                   |       | 3 Cylinder , Water cooled,4 stroke                                                     |                            |
| Displace ment          | L     | 1.1/2.27                                                                               | 1.123                      |
| Standard configuration |       | Enclosed cab<br>Pilot control                                                          |                            |
| Options                |       | Yanmer engine<br>Big flow hydraulic pump<br>Starting assist system<br>Air conditioning |                            |


**ST65**

Operating weight: 3800kg  
Bucket capacity: 0.5m<sup>3</sup>

**ST75**

Operating weight: 4100kg  
Bucket capacity: 0.6m<sup>3</sup>

| Model                  |                | ST65                                                                                              | ST75                                                                                              |
|------------------------|----------------|---------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------|
| Rated load             | kg             | 1000                                                                                              | 1050                                                                                              |
| Tipping load           | kg             | 2000                                                                                              | 2000                                                                                              |
| Bucket capacity        | m <sup>3</sup> | 0.5                                                                                               | 0.6                                                                                               |
| Operating Weight       | kg             | 3800                                                                                              | 4100                                                                                              |
| Max.travel speed       | km/h           | 12                                                                                                | 12                                                                                                |
| Hydraulic pump flow    | L/min          | 75                                                                                                | 75                                                                                                |
| Fuel tank capacity     | L              | 90                                                                                                | 90                                                                                                |
| Track type             |                | 320×68                                                                                            | 320×68                                                                                            |
| Dimensions             | mm             | 3500×1830×2160                                                                                    | 3500×1830×2160                                                                                    |
| Max.Operating height   | mm             | 3350                                                                                              | 3350                                                                                              |
| Hinge pin height       | mm             | 2900                                                                                              | 2900                                                                                              |
| Width with bucket      | mm             | 1890                                                                                              | 1890                                                                                              |
| Tread width            | mm             | 1510                                                                                              | 1510                                                                                              |
| Wheelbase              | mm             | 1500                                                                                              | 1500                                                                                              |
| Ground clearance       | mm             | 205                                                                                               | 205                                                                                               |
| Dumping angle          | °              | 40                                                                                                | 40                                                                                                |
| Dumping height         | mm             | 2350                                                                                              | 2350                                                                                              |
| Dumping reach          | mm             | 700                                                                                               | 700                                                                                               |
| Engine Maker/Model     |                | XinChai A498BZG                                                                                   | XinChai A498BZG                                                                                   |
| Power/Rotate speed     |                | 55KW (75HP) /2500rpm                                                                              | 55KW (75HP) /2500rpm                                                                              |
| Type                   |                | 4Water cooled,4 stroke                                                                            | 4Water cooled,4 stroke                                                                            |
| Displace ment          | L              | 3.168                                                                                             | 3.168                                                                                             |
| Standard configuration |                | Enclosed cab<br>Pilot control                                                                     | Enclosed cab<br>Pilot control                                                                     |
| Options                |                | Mitsubishi/Yanmer engine<br>Big flow hydraulic pump<br>Starting assist system<br>Air conditioning | Mitsubishi/Yanmer engine<br>Big flow hydraulic pump<br>Starting assist system<br>Air conditioning |

## SKID STEER LOADER



### ST100

Operating weight: 4500kg  
Bucket capacity: 0.6m<sup>3</sup>

### ST125

Operating weight: 4600kg  
Bucket capacity: 0.8m<sup>3</sup>

| Model                  |                | ST100                                                                                      | ST125                                                                                   |
|------------------------|----------------|--------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------|
| Rated load             | kg             | 1200                                                                                       | 1500                                                                                    |
| Tipping load           | kg             | 2400                                                                                       | 1400                                                                                    |
| Bucket capacity        | m <sup>3</sup> | 0.6                                                                                        | 0.8                                                                                     |
| Operating Weight       | kg             | 4500                                                                                       | 4600                                                                                    |
| Max.travel speed       | km/h           | 12/18                                                                                      | 12/18                                                                                   |
| Hydraulic pump flow    | L/min          | 88                                                                                         | 88                                                                                      |
| Fuel tank capacity     | L              | 90                                                                                         | 90                                                                                      |
| Tire type              |                | 320×84                                                                                     | 450×86                                                                                  |
| Dimensions             | mm             | 3700×2030×2160                                                                             | 3500×2140×2160                                                                          |
| Max.Operating height   | mm             | 4070                                                                                       | 3350                                                                                    |
| Hinge pin height       | mm             | 3150                                                                                       | 2770                                                                                    |
| Width with bucket      | mm             | 2030                                                                                       | 2160                                                                                    |
| Track width            | mm             | 1710                                                                                       | 1690                                                                                    |
| Wheelbase              | mm             | 1500                                                                                       | 1500                                                                                    |
| Ground clearance       | mm             | 205                                                                                        | 205                                                                                     |
| Dumping angle          | °              | 40                                                                                         | 40                                                                                      |
| Dumping height         | mm             | 2550                                                                                       | 2450                                                                                    |
| Dumping reach          | mm             | 700                                                                                        | 700                                                                                     |
| Engine Maker/Model     |                | WeiChai WP 4.1                                                                             | WeiChai WP 4.1                                                                          |
| Power/Rotate speed     |                | 74KW (100HP) /2500rpm                                                                      | 103KW (140HP) /2300rpm                                                                  |
|                        |                | 4Water cooled,4 stroke                                                                     | 4Cylinder in-line,Water cooled,4 stroke,Diesel , Tier 3                                 |
| Displace ment          | L              | 4.1                                                                                        | 4.1                                                                                     |
| Standard configuration |                | Enclosed cab<br>Pilot control                                                              | Enclosed cab<br>Pilot control                                                           |
| Options                |                | Mitsubishi engine<br>Big flow hydraulic pump<br>Starting assist system<br>Air conditioning | Cummins engine<br>Big flow hydraulic pump<br>Starting assist system<br>Air conditioning |



MOB/WHATSAPP:15712777587  
COMPANY:QINGDAO SLILIFT INTELLIGENT  
EQUIPMENT CO., LTD.  
EMAIL: SALES@SLILIFT.COM  
ADDRESS: NO. 80, NINGXIA ROAD, SHIBEI  
DISTRICT,  
QINGDAO CITY 266000, SHANDONG  
PROVINCE



**CE CERTIFICATED**

